

LED Module Light String

08-00504 - 15,000 Lumen/125 Watt
U-GROUND Light String with Metal Cage



16 AWG

FEATURES

- 5 Modules
- 3,000 Lumen Per Module
- 5-15 Female Receptacle to Connect Additional Lights
- High Impact Poly Carbonate Lens
- Corrosion Resistant Powder Coated Metal Guard
- Carabiner Hooks Included
- Magnets Included
- Suitable for Wet Locations
- Jobsite Tough

SPECIFICATIONS

- 50 foot, 16/3 AWG
- 300V SJTW Cable
- 15,000 Lumen
- 5-15 Plug
- 5-15 Receptacle with Cover
- LED Driver Capable of 120-277V
- 2,000 Volt Surge Protection
- 5000 Kelvin Color Temperature
- Black PC Joints
- Powder Coated Metal Cage Guard
- Carabiner Hooks Included
- Magnets Included
- 3,000 Lumen per bulb
- cETLus

PACK QUANTITY/UPC


- Pack Quantity = 4
- UPC# 8-03058-1504-6





LED Temporary Light String

08-00504 & 08-00505

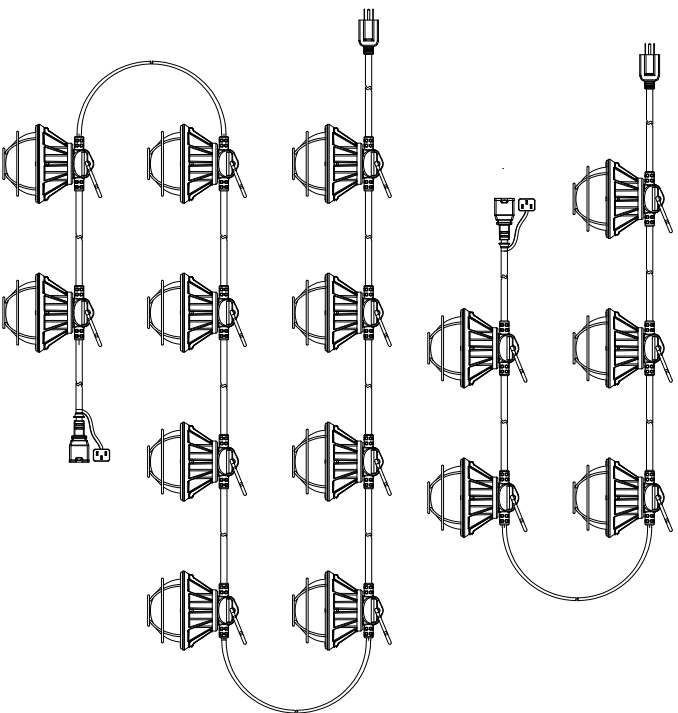

<http://www.voltec-industries.com/>

BASIC INFO

Model	Power	Voltage	QTY	Lumen	Cable	Suitable for Wet Locations
08-00504	125W	AC 120V	5 units	15,000lm	16/3 cable	
08-00505	250W	AC 120V	10 units	30,000lm	16/3 cable	

Application:

Suitable for construction sites or any other location requiring a temporary light string.

CAUTION !!

- Make sure the distances between live part and metal part of the device can satisfy reinforce or double insulation.
- Before installation and maintenance of the device, please disconnect the power to prevent electric shock.
- The LED temporary light string must be installed in an appropriate environment, operating in harsh environments may shorten the lifespan or even damage the device.
- Please keep the device away from any corrosive substance, clean with dry cloth only.
- To ensure personal safety, please make sure the device is staying firmly and securely when install on high places.

LINKABLE

- 125W - Connect up to 10 bunches
- 250W - Connect up to 5 bunches

- *LPW is Lumen Per Watt*
- *CCT (Kelvin) is the correlated color temperature*
- *CRI (Color Rendering Index) is the ability to represent the original color of a substance*
- *PF (Power Factor) is the ratio of the actual power consumed to the power supply capacity*
- *Lift (LT70) is service life of LED chips*

Temporary Light String - Daisy Chain

08-00504 , 08-00505, 08-00507, 08-00508, 08-00511,
08-00512, 08-00513, 08-00514, 08-00515

Below identifies how many units can be linked together based on the Driver/Voltage.

Part No	Watt	Driver/ Voltage	18 Gauge Cable (Max Linkable) Max Length	16 Gauge Cable (Max Linkable) Max Length
08-00504 50 ft	125W	120V		(10 Units) = 500 ft
		277V		(18 Units) = 900 ft
08-00505 100 ft	250W	120V		(5 Units) = 500 ft
		277V		(9 Units) = 900 ft
08-00507 50 ft	80W	120V		(8 Units) = 450 ft
		277V		(16 Units) = 800 ft
08-00508 100 ft	160W	120V		(4 Units) = 400 ft
		277V		(8 Units) = 800 ft
08-00511 50 ft	65W	120V	(7 Units) = 350 ft	
		277V	(12 Units) = 600 ft	
08-00512 100 ft	130 W	120V	(4 Units) = 400 ft	
		277V	(6 Units) = 600 ft	
08-00513 100 ft	130W	120V	(4 Units) = 400 ft	
		277V	(6 Units) = 600 ft	
08-00514 50 ft	65W	120V		(10 Units) = 500 ft
		277V		(18 Units) = 900 ft
08-00515 100 ft	130 W	120V		(5 Units) = 500 ft
		277V		(9 Units) = 900 ft