

LED Module Light String



08-00507 - 10,000 Lumen/80 Watt
U-GROUND Light String

16 AWG

FEATURES

- 50ft/5 Modules
- 2,000 Lumen (16 Watt) Per Module
- 125 Lumen per Watt
- 5-15 Female Receptacle to Connect Additional Lights
- High Impact Poly Carbonate Lens
- Carabiner Hooks Included
- Magnets Included
- Suitable for Wet Locations
- Jobsite Tough

SPECIFICATIONS

- 50 foot, 16/3 AWG
- 300V SJTW Cable
- 10,000 Lumen/80 Watt
- 5-15 Plug
- 5-15 Receptacle with Cover
- LED Driver Capable of 120-277V
- 2,000 Volt Surge Protection
- 5000 Kelvin Color Temperature
- Black PC Joints
- Carabiner Hooks Included
- Magnets Included
- cETLus

PACK QUANTITY/UPC

- Pack Quantity = 4
- UPC# 8-03058-1507-7





VOLTEC POWER & LIGHTING
3230 E Imperial Hwy #218
Brea, CA 92821
909.606.1991

Fax: 909.606.0281
Email: customerservice@voltec-industries.com
Web: www.voltec-industries.com



LED Temporary Light String

08-00507 & 08-00508

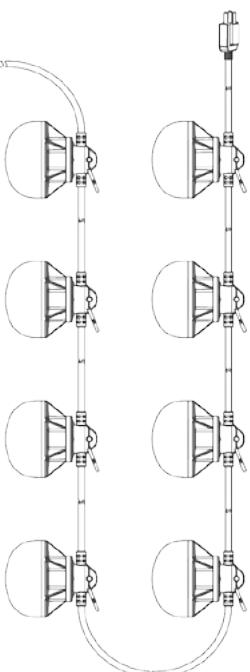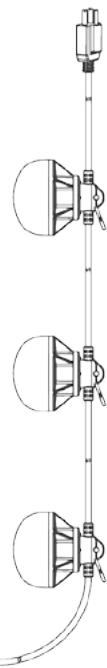

<http://www.voltec-industries.com/>

BASIC INFO

Model	Power	Voltage	QTY	Lumen	Cable	Suitable for Wet Locations
08-00507	80W	AC 120V	5 units	10,000lm	16/3 cable	
08-00508	160W	AC 120V	10 units	20,000lm	16/3 cable	

Application:
Suitable for construction sites or any other location requiring a temporary light string.

CAUTION!!

- Make sure the distances between live part and metal part of the device can satisfy reinforce or double insulation.
- Before installation and maintenance of the device, please disconnect the power to prevent electric shock.
- The LED temporary light string must be installed in an appropriate environment, operating in harsh environments may shorten the lifespan or even damage the device.
- Please keep the device away from any corrosive substance, clean with dry cloth only.
- To ensure personal safety, please make sure the device is staying firmly and securely when install on high places.

LINKABLE

80W - For only use with this product connect up to 8 bunches
160W - For only use with this product connect up to 4 bunches

- *LPW* is Lumen Per Watt
- *CCT (Kelvin)* is the correlated color temperature
- *CRI (Color Rendering Index)* is the ability to represent the original color of a substance
- *PF (Power Factor)* is the ratio of the actual power consumed to the power supply capacity
- *Lift (L70)* is service life of LED chips

Temporary Light String - Daisy Chain

08-00504, 08-00505, 08-00507, 08-00508, 08-00511,
08-00512, 08-00513, 08-00514, 08-00515

Below identifies how many units can be linked together based on the Driver/Voltage.

Part No	Watt	Driver/ Voltage	18 Gauge Cable (Max Linkable) Max Length	16 Gauge Cable (Max Linkable) Max Length
08-00504 50 ft	125W	120V		(10 Units) = 500 ft
		277V		(18 Units) = 900 ft
08-00505 100 ft	250W	120V		(5 Units) = 500 ft
		277V		(9 Units) = 900 ft
08-00507 50 ft	80W	120V		(8 Units) = 450 ft
		277V		(16 Units) = 800 ft
08-00508 100 ft	160W	120V		(4 Units) = 400 ft
		277V		(8 Units) = 800 ft
08-00511 50 ft	65W	120V	(7 Units) = 350 ft	
		277V	(12 Units) = 600 ft	
08-00512 100 ft	130 W	120V	(4 Units) = 400 ft	
		277V	(6 Units) = 600 ft	
08-00513 100 ft	130W	120V	(4 Units) = 400 ft	
		277V	(6 Units) = 600 ft	
08-00514 50 ft	65W	120V		(10 Units) = 500 ft
		277V		(18 Units) = 900 ft
08-00515 100 ft	130 W	120V		(5 Units) = 500 ft
		277V		(9 Units) = 900 ft